

CARVART®

glassPOD
Freestanding Box

glassPOD

Freestanding Box

glassPOD a closed self-supporting cell, a POD, to be inserted in the center of a room or open plan office, where you need to create a room such as a boardroom or private meeting room/office. The POD is constructed from a metal structure supporting both the glass walls and ceiling, in a special sound absorbing material. The ceiling can be adapted to include sprinklers and air-conditioning ducts with LEDs lighting in the perimeter that illuminate the POD making it autonomous from lighting point of view. All materials used in the construction of POD are 99% fire retardant.




glassPOD
Freestanding Box






CARVART®

technical info



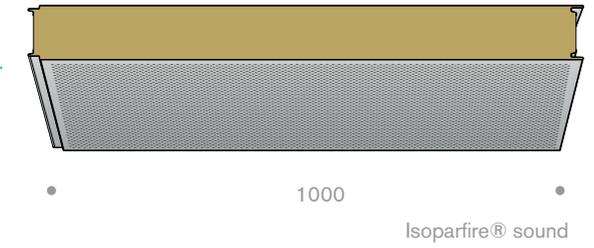


The ceiling is made using an insulating layer of mineral fiber attached to, two 0.5 mm panels of pre-painted galvanized steel or plastic, stainless steel, natural aluminum embossed or pre-painted, of which the inner one is micro-perforated to further reduce the passage of sound.


Technical data:
length mm 2000 - 4000
height mm 2200 - 2700

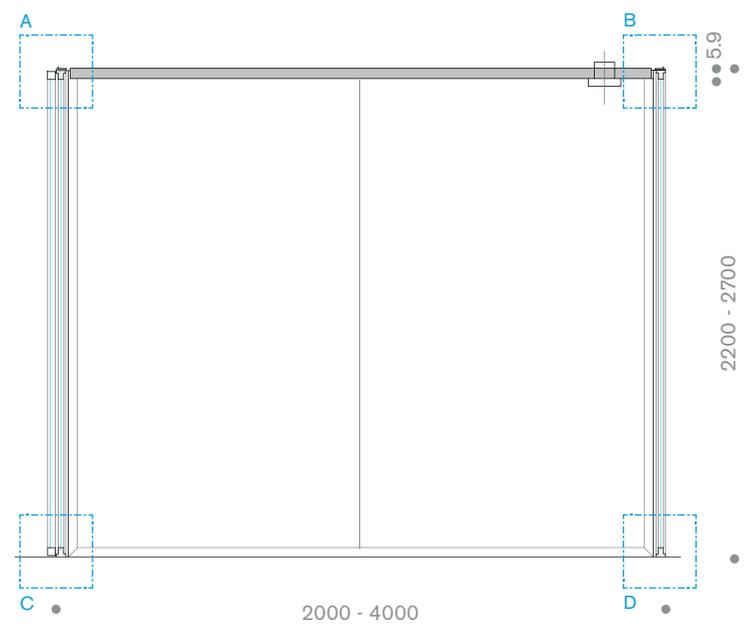


SECTION

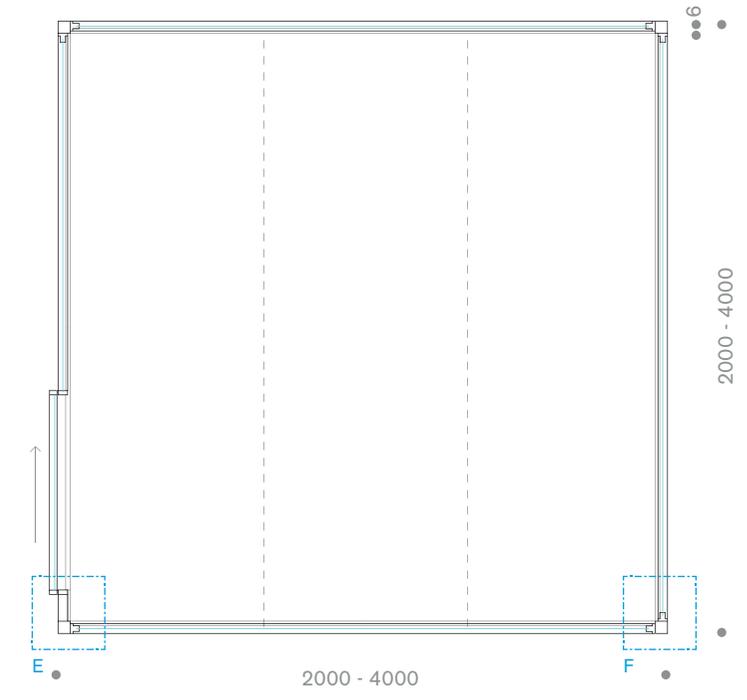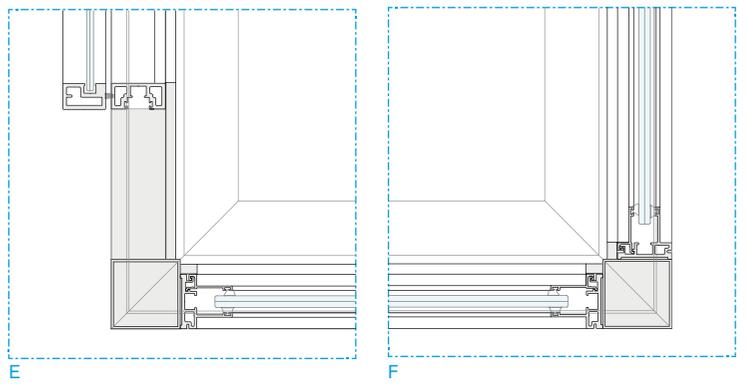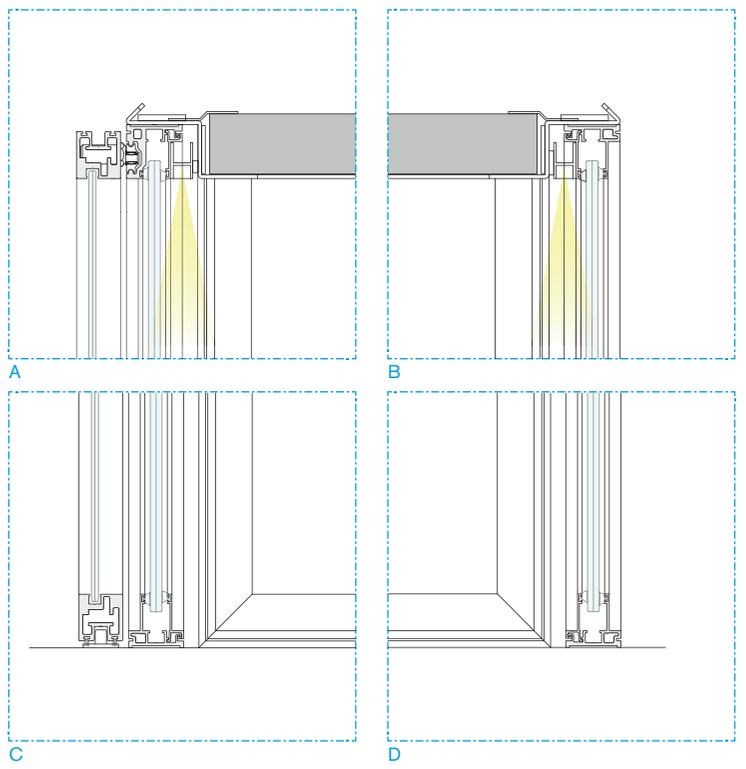


PLAN

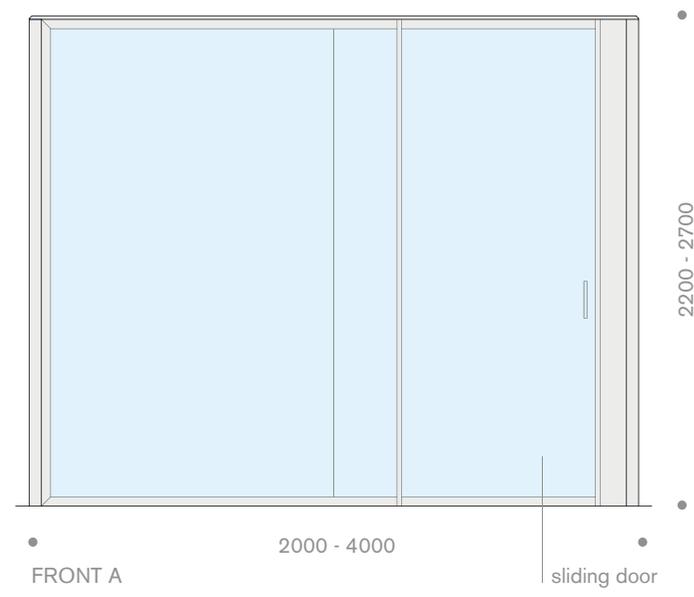

FRONT A

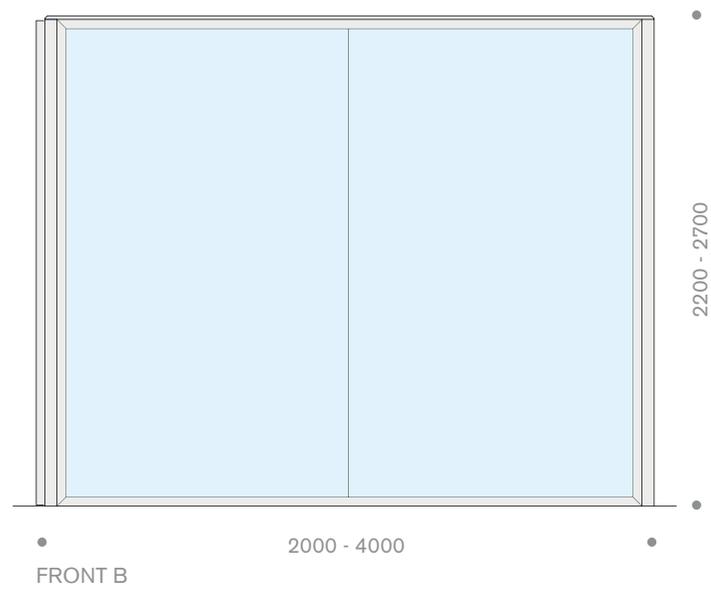

FRONT B

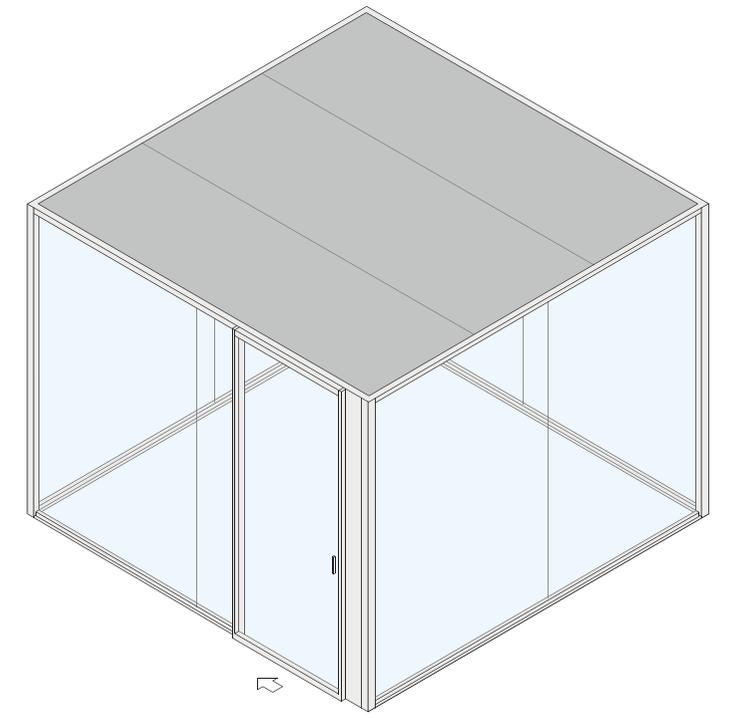

On the left: technical details of the connecting joints.
 A-B: vertical sections where you can see the upper joints with the LED light strip.
 C-D: bottom vertical sections.
 E-F: the details of the connections to the glass panels, horizontal sections.
 This page: two examples with minimum and maximum dimensions and an isometric view.